


LoRa BASESTATIONS FOR PRIVATE LoRa NETWORKS

Deployed at location with connectivity to a TCP/IP network

- Connectivity: TCP/IP over 3/4G, fiber, ADSL or Vsat...
- Power supply : power over Ethernet or AC (110-220V); DC (42-57 V, 4.7 W max)

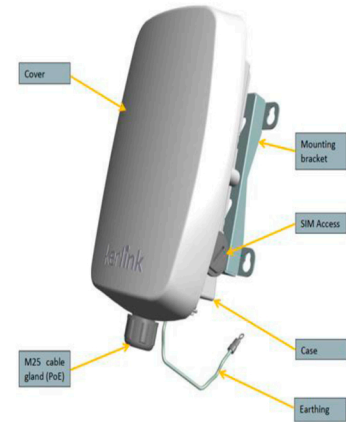

One base stations accomodate up to 300 sensors communicating every 10 minutes